

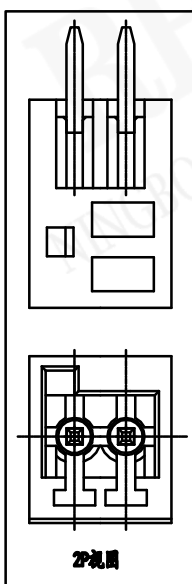
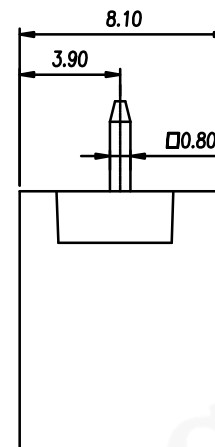


P.C.B. LAYOUT

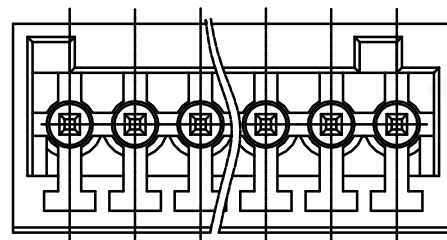

2P视图

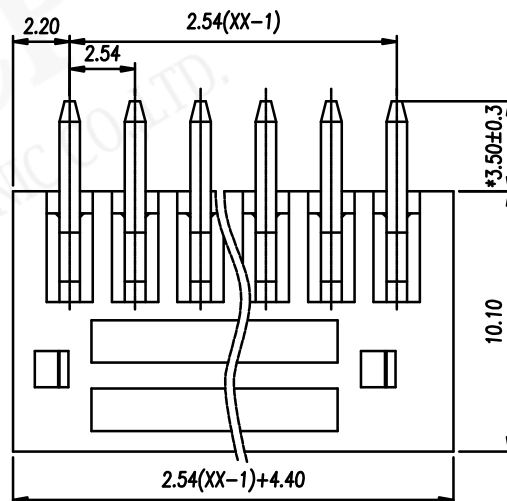

UL/CUL 技术参数			
UL/CUL Technical Data			
等级	Use Group	B	C D
额定电压	Rated Voltage [V]	150	/ /
额定电流	Rated Current [A]	5	/ /
接线范围	Wire Range		
单/多芯线	Solid/Stranded [AWG]	/	
耐电压	Withstanding Voltage	1300V/1Min	
IEC 技术参数			
IEC Technical Data			
过电压类别	Overvoltage Category	III	III II
污染等级	Contamination Class	3	2 2
额定电压	Rated Voltage [V]	80	160 320
额定电流	Rated Current [A]	5	5 5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5 2.5
导线截面积	Conductor cross section		
硬质/柔性导线	Solid/ flexible [mm ²]	/	
材料			
绝缘材料	Insulation Material	PA66	
阻燃等级	Imflamability	UL94V-0	
导体材料	Contactior Material	铜合金 Copper alloy	
导体表面镀层	Contactive Coating	镀锡 Sn Plated	
一般参数			
间距	Pitch /极数 Poles [mm] / [P]	2.54 / 02-24	
剥线长度	Stripping Length [mm]	/	
螺丝	Screw/扭矩 Torque(Max) [N.m]	/	
工作温度	Operating temperature [°C]	-40~105	
引针尺寸	Pin Dimensions [mm]	0.8*0.8	
PCB板孔径	PCB Hole Diameter [mm]	Ø1.4	

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to	over 10 to 100	to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

UNITS:MM

SHEET SIZE:A4

SCALE:---

RE-C-EDV-2.54-XXP-4

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

>0~3

>3~18

>18~50

>50~120

TERMINAL BLOCKS

±0.12

±0.15

±0.3

±0.5