

Proper Cable

Material

Housing: LCP, UL 94V-0

Contact: Phosphor Bronze, Tin

Electrical

Voltage rating: 50 V

Current Rating: 1 A


Withstanding Voltage: 200 V

Insulation resistance: 800MΩ.Min.

Contact resistance: 40 mΩ.Max.

Mechanical

Temp. Range: -40 °C ~ + 85 °C

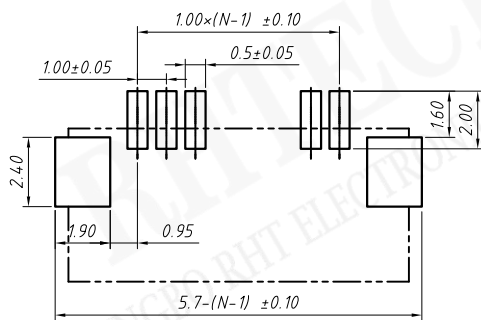

PCB LAYOUT

Order Information

RE - C - 1240G - 2.0- XX - T-R

