
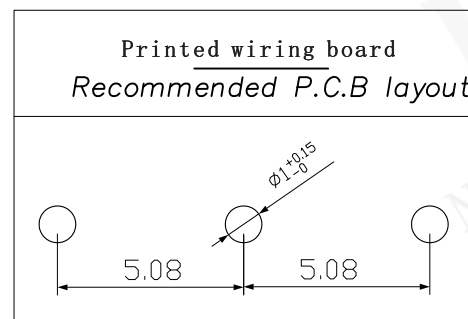


- 1、 Working Voltage: **250V DC**;
- 2、 Working Current: **1 A**;
- 3、 Contact Resistance: $\leq 50m\Omega$;
- 4、 Insulation Resistance: $\geq 100M\Omega$;
- 5、 Press Force: $30 \pm 15gf$;
- 6、 Life: $\geq 1000,000$ time.

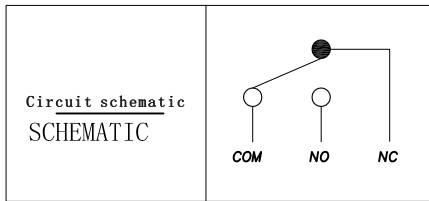

7	Iron bar	SUS	-----	-----
6	Cover plate	PC	Black	-----
5	Press handle	POM	Red	-----
4	Reed	Phosphor copper	-----	-----
3	Contact point	Silvering	-----	-----
2	Mount	PA66	White	-----
1	Terminal	H62Y 0.5mm	-----	Silvering
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:MM

SHEET SIZE:A4

SCALE:---

RE-S-KW10-Z3P030

>0~3

>3~18

>18~50

>50~120

± 0.12

± 0.15

± 0.3

± 0.5

SWITCH