





CONTACT:GOLD PLATED 1u"
P2:USB2.0 MICRO plug

L



P1:USB2.0 A Jack
CONTACT:GOLD PLATED 1u"



| | |
|-----------------------|-----------|
| Model | L (m) |
| RE-CAB-R13-USBAB-L015 | 0.15±0.02 |


WIRING DIAGRAM

CABLE SECTION


P2 MICRO 5P

P1 USB A TYPE F

- 5-GND
- 4-Sense
- 3-D+
- 2-D-
- 1-VCC

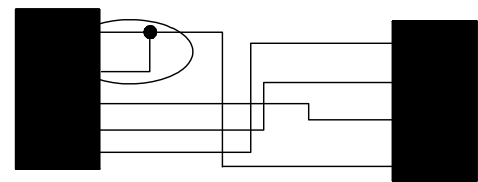

- VCC
- D-
- D+
- GND

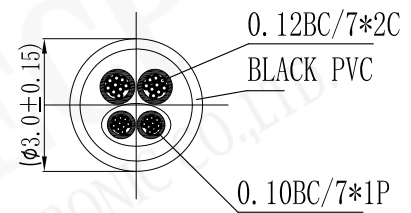

NOTE:

1. CABLE:0.12BC*7*2C+0.10BC*7*1P+OD3.0mm BLACK PVC JACKET.
1. CONNECTORS:USB2.0 A JACK*1PCS, USB2.0 MICRO B PLUG*1PCS, GOLD PLATED 1u", SHELL:NICKEL PLATED
2. MOLD ASSEMBLY, BLACK COLOR
3. OPEN/SHORT TEST:100% TEST. INSULATION:5M
4. ROHS COMPLIANT

NINGBO RHT ELECTRONIC CO., LTD

| | | |
|----------|---------------|-----------|
| UNITS:MM | SHEET SIZE:A4 | SCALE:--- |
| >0~3 | >3~18 | >18~50 |
| ±0.12 | ±0.15 | ±0.3 |
| | | >50~120 |
| | | ±0.5 |

| |
|-----------------------|
| RE-CAB-R13-USBAB-L015 |
| CABLE |